


ELECTRIC SQUIB**Specifications No. TSU/DDC/18**

S/No.	Characteristics	Passing Standard	Reference Document
1	Fuse Head	Delay fuse head(Ignition bead)	AD 439488 of USA Defense Documentation Centre for Scientific and Technical Information.
2	Resistance	1.6 Ohms to 2.4 Ohms	-
3	Lead Wire Length	25 cm Tin Coated Copper Wire with PVC Coating	-
4	Plug	9.0mm Collar Less (Molding) Rubber Plug	-
5	Sleeve	Transparent PVC Sleeve	-

NOTE :- 20 Nos of samples is required to be submitted along with the quotation, otherwise the tenders are liable to be ignored.


QC LAB
TSU BSF TEKANPUR

TITLE : ELECTRIC SQUIB


DRAWING No. : TSU/R&D/263

MATERIAL : MENTIONED BELOW

ESTIMATED WEIGHT : --


MACHINING DEVIATION TO ISI 2102 MEDIUM GRADE UNLESS SPECIFIED OTHERWISE										LENGTH IN mm OF SHORTER SIDE OF ANGLE			
LENGTH OR DIA	UPTO	6	30	120	315	1000	2000	4000	ABOVE	UPTO 6	6-30	30-120	120-400
		±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0	±3.0	±1'	±30'	±20'	±10'

ASSEMBLED VIEW OF ELECTRIC SQUIB

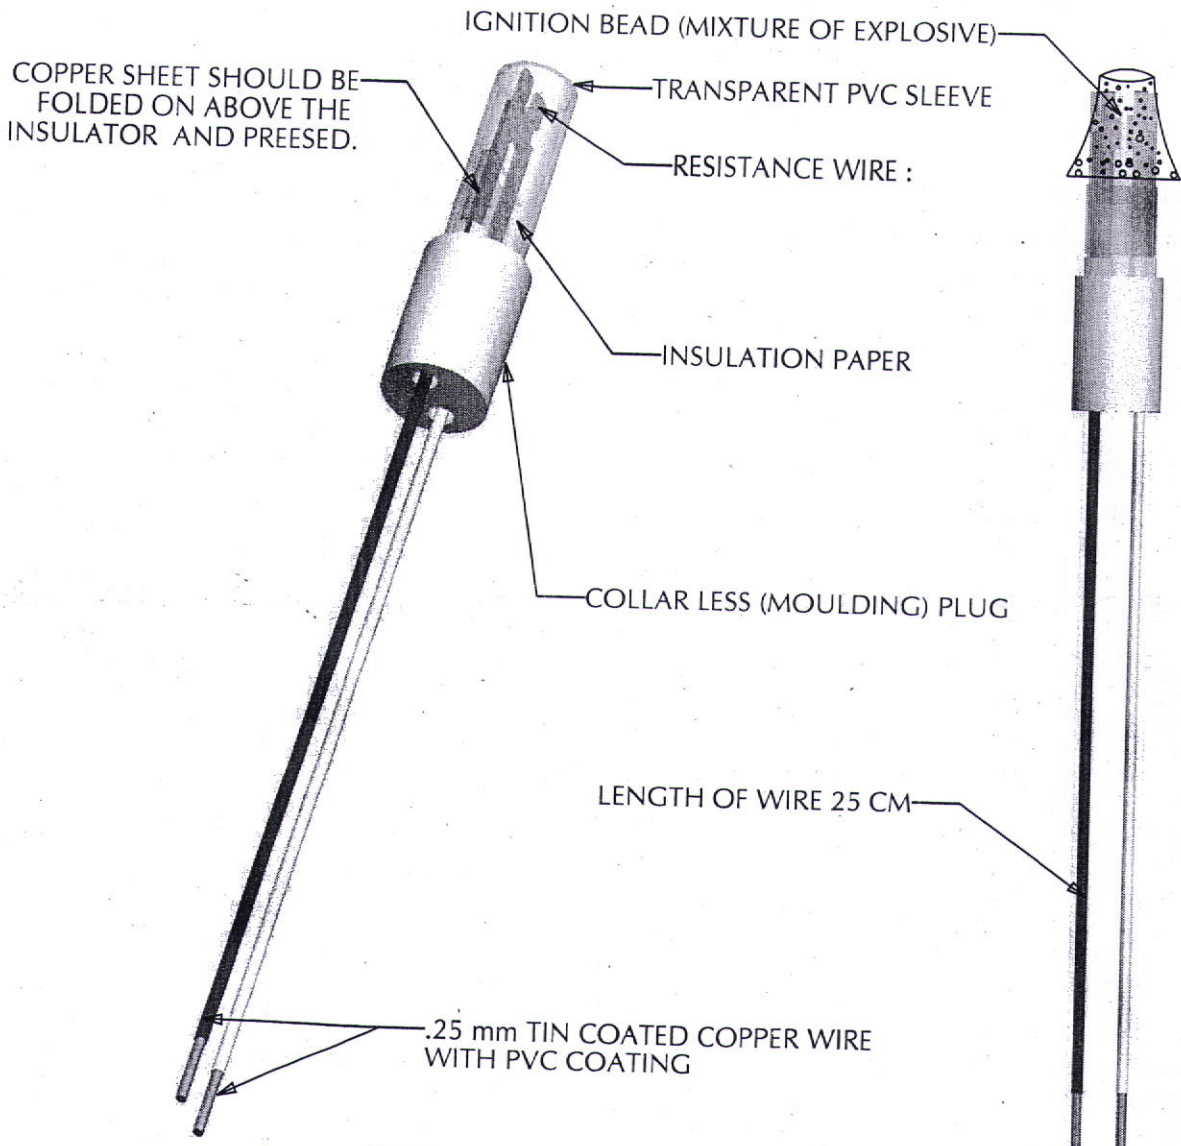

SCALE 2.500

S.No	AMENDMENT	SIGN I/C	SIGN O/C	DATE	SIGN	DATE
					DRN : HC K VELU	15/5/18
					CHD : INSP GAURAV SWAMI	15/5/18
					RE-CHD : VIKAS KHATRI, AC/AM	15/5/18
					RE-CHD: MANOHAR LAL, 2IC/Deputy GM	15/5/18
					APPD: EDWIN JOHN BENNETT, DIG/GM	15/5/18
					SCALE : 1 : 2.5	
					DATED : 15.05.2018	
					SHEET : 01 OF 01	
ALL DIMENSIONS ARE IN mm						



DRAWING & REPROGRAPHIC SECTION

TEAR SMOKE UNIT,BSF, TEKANPUR, GWALIOR (M.P.), PIN - 475 005